

CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this Correspondence and the documents referred to as attached therein are being deposited with the United States Postal Service in an envelope a "Express Mail Post Office to Addressee" mailing Label Number EK804337373US addressed to the: Commissioner of Patents and Trademarks, Washington, D.C. 20231, on the date typed below.

June 14, 2000
Date

William C. Fuess
Typed Name of Person
Mailing Correspondence
and Documents

William C. Fuess
Signature of Person
Mailing Correspondence
and Documents

PATENT

Attorney's Docket No.: UCSD 99-116

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Honorable Commissioner of
Patents and Trademarks
Washington, D.C. 20231

TRANSMITTAL OF UTILITY PATENT APPLICATION FOR FILING

Dear Sir:

Transmitted herewith for filing is the utility patent application of inventors Lawrence Larson and Wei Xiang entitled **AN S-BAND LOW-NOISE AMPLIFIER WITH SELF-ADJUSTING BIAS FOR IMPROVED POWER CONSUMPTION AND DYNAMIC RANGE IN A MOBILE ENVIRONMENT**. Enclosed are:

- X_ A duplicate copy of this transmittal letter.
- X_ One stamped, self-addressed, postcard for the PTO Mail Room date stamp.
- X_ One utility patent application containing pages 1 - 27, and
 - X_ a declaration or oath for the utility patent application including a power of attorney, and
 - X_ 1 copy of 4 sheets of informal drawings
- X_ A verified statement relating to small entity status.

06/14/00
jc862 U.S. PTO

jc862 U.S. PTO
09/595508
06/14/00

06/14/00
jc862 U.S. PTO

2. The filing fee has been calculated as shown below:

For:	No. Filed	No. Extra	Small Entity Rate	Fee
BASIC FEE			\$345	\$345
TOTAL CLAIMS	16 - 20 =	0	x \$ 9=	\$
INDEP. CLAIMS	6 - 3 =	0	x \$39=	\$234
MULTIPLE DEPENDENT CLAIM(S)			+\$120=	\$
			TOTAL=	\$579

X_ A check in the amount of \$ 579 to cover the filing fee is enclosed.

X_ A duplicate copy of this letter is enclosed.

Sincerely yours,

William C. Fuess

William C. Fuess
Registration No. 30,054
Attorney for Applicant(s)

FUESS & DAVIDENAS
Attorneys-at-Law
10951 Sorrento Valley Road
Suite II-G
San Diego, California 92121-1613
Telephone: (619) 452-8293
Facsimile: (619) 452-6035
E-mail: fuess@funtv.com

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Lawrence Larson and Wei Xiang

Attorney's Docket No.: UCSD 99-116

Title: **AN S-BAND LOW-NOISE AMPLIFIER WITH SELF-ADJUSTING BIAS FOR IMPROVED POWER CONSUMPTION AND DYNAMIC RANGE IN A MOBILE ENVIRONMENT**

VERIFIED STATEMENT UNDER 37 CFR §1.9(f) and §1.27(d)
CLAIMING STATUS AS A SMALL ENTITY -- NONPROFIT ORGANIZATION

I, William Fuess, attorney representative of the Technology Transfer Office of the University of California, San Diego, in the matter of the above-identified patent application hereby declare that:

1. I am empowered to act on behalf of THE REGENTS OF THE UNIVERSITY OF CALIFORNIA, a corporation duly organized under and pursuant to the laws of CALIFORNIA having its principal place of business at 300 Lakeside Drive, 22nd Floor, Oakland, California 94612-3550, in the matter of this VERIFIED STATEMENT for the above-identified patent application.

2. THE REGENTS OF THE UNIVERSITY OF CALIFORNIA is a University of higher education of the State of California and a nonprofit organization.

3. The rights under contract or law in the invention contained within above-identified provisional patent application entitled **AN S-BAND LOW-NOISE AMPLIFIER WITH SELF-ADJUSTING BIAS FOR IMPROVED POWER CONSUMPTION AND DYNAMIC RANGE IN A MOBILE ENVIRONMENT** have been assigned to and remain with THE REGENTS OF THE UNIVERSITY OF CALIFORNIA. THE REGENTS OF THE UNIVERSITY OF CALIFORNIA has not assigned, granted, conveyed or licensed, and is under no obligation under contract or law to assign, grant, convey or license any rights in the invention nor in the application to any person who could not be classified as an independent inventor if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR §1.9(d) or a non-profit organization under 37 CFR §1.9(e).

4. THE REGENTS OF THE UNIVERSITY OF CALIFORNIA qualifies as a nonprofit organization as defined in 37 CFR §1.9, Subsection (e) for paying reduced fees under section 41 Subsections (a) and (b) of Title 35, United States Code, with regard to said application.

5. I acknowledge the duty under 37 CFR §1.28(b) to file, in this application or any patent issuing thereon, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of any issuance fee of any maintenance fee due after that date on which status as a small entity is no longer appropriate.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent(s) issuing thereon.

June 14, 2000

Date

William C. Fuess

Signature of William Fuess
Attorney representative of
the Technology Transfer Office
University of California, San Diego
9500 Gilman Drive, MC 0093
La Jolla, CA 92093-0093
Attorney representative of THE REGENTS OF THE
UNIVERSITY OF CALIFORNIA
Acting on behalf of THE REGENTS OF THE
UNIVERSITY OF CALIFORNIA
300 Lakeside Drive, 22nd Floor
Oakland, CA 94612-3550

AN S-BAND LOW-NOISE AMPLIFIER WITH SELF-ADJUSTING BIAS FOR IMPROVED POWER CONSUMPTION AND DYNAMIC RANGE IN A MOBILE ENVIRONMENT

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention generally concerns amplifier design and amplifier operation, particularly for wireless cellular radio communications applications where occasional jamming is prevalent.

10 The present invention particularly concerns the realization by both design and operation of a Low Noise Amplifiers (LNA) simultaneously improved in (i) dynamic range and (ii) overall power consumption, these seemingly contradictory requirements being satisfied by optimizing power consumption in the LNA in consideration of its instant operating environment.

15 The present invention further particularly concerns an ungrounded power detector that is both fast and sensitive to detect the output power of, for example, a LNA.

2. Description of the Prior Art

2.1 Low Noise Amplifiers, and Amplifier Operation in the Presence of Jamming

20 With the explosive growth of wireless communications, the airwaves are rapidly being filled with signals of varying strengths and frequencies. Immunity to jamming has subsequently become a significant concern to any communication system. This is especially true for a mobile communication system, such as a
25 cellular phone, as it is difficult to predict the jamming environment the system will be exposed to. At the same time, the need for portability, and thus long battery life, requires the system to consume as little power as possible.

30 In a typical wireless system, filtering before the low-noise amplifier can reject most jammers. However, a high rejection ratio incurs high insertion loss -- a direct contributor of receiver sensitivity degradation. In addition, many close-in jammers are

impossible to block given the size and cost restrictions of a mobile system. A number of different jammers including frequency modulation radio, television, navigational beacons, and microwave ovens will typically be detected by an omni-directional 2.5 GHz antenna. The low-noise amplifier, therefore, must have a large dynamic range: namely, a low noise figure and low intermodulation distortion. See S. Chen, "Linearity Requirements for Digital Wireless Communication," IEEE GaAs IC Symp. Dig., Anaheim, CA, pp. 29-32, October 1997.

To meet these demands, the LNAs often consume the most power in a receiver; tradeoffs are usually required to balance dynamic range versus power consumption.

2. Power Detector

Power detector circuits are many and various, and are not commonly identified as requiring improvement. The low noise amplifier circuit of the present invention will show, however, that it is useful (but not necessary) to detect instantaneous amplifier output power, or (equivalently) voltage (into load), with two orders of magnitude (i.e., x100) greater sensitivity than existing Schottky diode power detectors. To this end the present invention will be found to encompass a power detection circuit that is particularly characterized in that the power is not detected relative to ground, ergo an un-grounded power detection circuit. When a signal in which power is detected need not be sunk to, nor referenced relative to, ground, then it becomes possible to detect variations in the signal with much greater sensitivity.

SUMMARY OF THE INVENTION

The present invention contemplates a Low Noise Amplifier (LNA) that circumvents the compromise between (i) dynamic range and (ii) power consumption by optimizing power consumption for the operating

environment. The LNA of the present invention exhibits a high dynamic range when it is near or in compression, but low power consumption when it is in small-signal operation where a large dynamic range is not necessary.

Furthermore, the dynamic range of the amplifier is extended: jamming may be countenanced without such distortion as would otherwise occur.

The present invention further contemplates an un-grounded a.c. signal power detection circuit that is very sensitive and very fast. This un-grounded power detection circuit will prove useful, even if not absolutely essential, in an s-band low-noise amplifier that is, in accordance with the present invention, improved for both power consumption and dynamic range, especially as both are required in a mobile environment.

1. A Method of Operating an Amplifier

In one of its aspects the present invention is embodied in a method of operating an amplifier where the amplifier -- or, more exactly, the transistor components of the amplifier -- has an load line. The amplifier is operated so as to emulate the property of a class AB amplifier where increasing amplifier input current raises the d.c. bias of the amplifier and increases amplifier output current. The amplifier is so operated nonetheless that it will never enter into class AB operation and will always operate in class A.

The method of operating an amplifier always in class A nonetheless to producing more output current from more input current includes two steps: 1) The amplified output of the class A amplifier is monitored; and, in response to detecting an increase in the amplifier output, 2) the load line of the amplifier is dynamically biasing to a higher d.c. bias point, causing the amplifier to consume more power and to produce a still larger amplified output signal. This "boosting" of the amplifier output could obviously cause a run-away condition, but this "boosting" is

realized, in accordance with the present invention, so as to always maintain the amplifier to operate in class A.

The purpose of so operating a class A amplifier is demonstrated when the amplifier is used, inter alia, as an initial low-noise radio signal amplifier in a wireless communication system. In this environment an increase in amplifier output signal is indicative of a presence of a strong jammer component in the amplifier input signal. Moving the load line of the amplifier will cause the amplifier to draw more current, beneficially decreasing a noise figure while increasing gain of the amplifier. The amplifier will ultimately be caused to reach a new steady state with higher power and improved linearity. This improved response comes, of course, at the cost of increased power consumption,

Conversely, if no increase in amplifier output signal is detected then this is indicative that no strong jammer component is present within the amplifier input signal. In such a case neither the d.c. bias, nor the load line, will be raised, and the amplifier will operate quiescently, conserving power.

2. An Amplifier of Improved Dynamic Range

In another of its aspects, the present invention can be considered to be embodied in an amplifier of improved dynamic range.

The amplifier includes at least one Field Effect Transistor (FET) receiving at its gate an input signal from an external source, and amplifying this input signal in accordance with its drain-source bias voltage V_{DS} to produce at its drain an amplified output signal.

A power detector circuit monitors the amplified output signal to produce a detected-power voltage signal V_{DD} .

A dynamic bias control circuit compares the detected-power signal V_{DD} to the drain-source bias voltage V_{DS} so as to vary a gate-to-source voltage bias V_{GS} of the input signal, actively moving a load line of the FET so as to cause the FET to consume more power

when the amplified output signal becomes large.

The amplified output signal typically so becomes large because of a presence of a strong jammer component of the input signal. In this eventuality moving the load line of the at least one FET will cause the FET to draw more current, beneficially decreasing noise figure while increasing gain. Ultimately the amplifier of which the at least one FET forms a part to reach a new steady state with higher power and improved linearity.

However, when no strong jammer component of the input signal is present, and when the amplified output signal is correspondingly not large, then the FET, and the amplifier of which it forms a part, will remain biased in an operational condition where power is conserved.

Accordingly, the self-adjusting bias of the at least one FET results in both (i) improved power consumption and (ii) improved dynamic range in an environment where exists occasional strong jammer signals.

The at least one Field Effect Transistor (FET) preferably consists of two cascaded FETs, and more preferably consists of two cascaded FETs where each is a GaS FET. The first, input, one of the two cascaded FETs is most preferably a low-noise PHEMT while the second, output, one of the two cascaded FETs is most preferably a hetero-junction FET.

The dynamic bias control circuit preferably consists of two operational amplifiers each varying a gate-to-source voltage bias V_{GS} of an associated FET.

The power detector circuit preferably consists of a resistor R , and a first diode D_1 series connected to form a diode-limited resistive divider. This diode-limited resistive divider is preferably temperature compensated by a second diode D_2 , making that the power detector circuit of which it forms a part is also temperature compensated.

The amplifier is normally operational in S band.

3. A Low-Noise Amplifier (LNA) Improved for Having an Elevated Third-Order Input Intercept Point (IP3) and a Reduced Noise Figure During Jamming

In yet another of its aspects, the present invention can be considered to be embodied in a low-noise amplifier (LNA) improved for having an elevated third-order input intercept point (IP3) and reduced noise figure during jamming.

The LNA includes (i) at least one active device amplifying in accordance with a bias signal an input signal received from an external source so as to produce an amplified output signal, (ii) a power detector monitoring the amplified output signal to produce a detected-power signal, and (iii) a dynamic bias control circuit responsive to any difference between the detected power signal and the bias signal to increase the bias signal. This increase in the bias signal actively moves a load line of the at least one active device so as to cause this device to consume more power when the amplified output signal is large.

By this operation, when the amplified output signal is large because of a presence of jamming then the moved load line of the at least one active device will cause the active device to draw more current, decreasing noise figure while increasing gain. The amplifier of which the at least one active device forms a part will be caused to reach a new steady state with higher power and improved linearity.

The power detector, the dynamic bias control circuit and the at least one active device preferably function in concert so that when no jamming is present then, at nominal small-signal conditions, the at least one active device will be biased to consume less power, conserving power in the amplifier of which it forms a part.

4. A Method of Low-Noise Amplification

In still yet another of its aspects, the present invention can be considered to be embodied in a method of low-noise amplification

that is improved for (i) conserving power during nominal small-signal conditions, and also for (ii) increasing amplification gain, and reducing amplification noise figure, during input signal jamming, making less likely any loss of data.

5 The method consists of amplifying in at least one active device -- and in accordance with a bias signal -- an input signal received from an external source so as to produce an amplified output signal.

10 This amplified output signal is monitored in a power detector to produce a detected-power signal.

15 Responsively to any difference between this detected power signal and the bias signal, the bias signal of the of at least one active device is adjusted in a dynamic bias control circuit so as to actively move a load line of this at least one active device. This movement of the load line causes this at least one active device to consume more power when the amplified output signal is large.

20 Accordingly, when the amplified output signal is large because of the presence of jamming (as in the cellular radio environment) the moved load line of the at least one active device will cause the active device to draw more current, decreasing noise figure while increasing gain. The amplifying will reach a new steady state with higher power and improved linearity.

25 However, when no jamming is present then, at nominal small-signal conditions, the at least one active device will be biased by the adjusting so as to consume less power, conserving power.

5. The Present Invention Expressed With Less Emphasis on Amplifier Power, and With More Emphasis on Amplifier Distortion

30 The previous explanations of the present invention, including that of the immediately previous section 4., have emphasized the situation-variable power consumption of a low-noise amplifier in accordance with the present invention, stating that the use of more

power (more current) will, in the presence of jamming, serve to decrease the amplifier noise figure and distortion (while increasing gain). While a practitioner of amplifier design and amplifier operation will understand that 1) power and 2) distortion are "two sides of the same coin", it may be useful for other persons less acquainted with the design and operation principles of low noise amplifiers to consider that the primary goal of the present invention is, after all, not to reduce power consumption but rather to reduce distortion, extending the operational range of the amplifier in the presence of jamming.

Emphasizing distortion, as opposed to power, reduction, it is therefore possible to perceive of the low-noise amplification method in accordance with the present invention as constituting four steps. An input signal received from an external source is amplified, in at least one active device and in accordance with a bias signal, so as to produce an amplified output signal. This amplified power signal is monitored in a power detector to produce a detected-power signal. This detected-power signal is compared with the bias signal to produce a difference signal. Finally, the bias signal of the at least one active device is adjusted, in and by a dynamic bias control circuit responsively to the difference signal, so as to (i) actively move a load line of this at least one active device until (ii) the difference signal becomes zero.

At this time such distortion as might otherwise have appeared in the amplified output signal will be minimized. This is because the moved load line will permit that a larger input may be handled by the amplifier without distortion. More exactly, when the amplified output signal is large because of a presence of a jamming signal then the moved load line of the at least one active device will permit that (i) a larger input resulting from combination of the jamming signal with the input signal will be amplified (ii) without such distortion as would otherwise occur in amplification of these combined signals should the load line have not been moved.

It will therefore be understood by a practitioner of amplifier

design and amplifier operation that moving the load line in response to operational conditions benefits both the amplifier distortion and noise figure, and also the power consumption.

6. An Un-grounded Power Detector Circuit

5 In yet another of its aspects the present invention is embodied in a circuit for detecting a peak power of an a.c. signal. The circuit includes a resistive voltage divider, located between a voltage source and ground, that produces a reference voltage signal. A diode is connecting at its cathode to both the a.c. signal and to the reference voltage signal. Meanwhile an envelope detector is connected both to the anode of the diode and to the reference voltage. The output of the detector circuit appears across this envelope detector.

10
15 Circuit operation is such that the detector circuit output is equal to the reference voltage when the a.c. signal is zero. When the a.c. signal is not zero then the detector circuit output is, however, equal to a sum of (i) the reference voltage, and (ii) a voltage (equivalent to power) of an envelope of the a.c. signal.

20 The power detector circuit is notable in that power is detected without direct reference to ground. Instead, power is detected relative to a reference voltage, and across a single diode. Signal propagation across the diode is very fast, on the order of nanoseconds. Therefore the power detector circuit has a very fast response time. Because (i) the power within the a.c. signal is not compared to ground, but rather to an elevated voltage reference signal, and (ii) the voltage across the diode is much smaller than a conventional Schottky-diode-based power detector, the power detection is also very sensitive, on the order of microvolts. This combination of speed and sensitivity is useful in realizing the improved low-noise amplifiers of the present invention.

30
These and other aspects and attributes of the present

invention will become increasingly clear upon reference to the following drawings and accompanying specification.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1, consisting of Figures 1a and 1b, are graphs showing the emissions of typical jammers plotted versus frequency.

Figure 2 is a graph showing the IV characteristics and load line of a Field Effect Transistor (FET) such as the first FET within the preferred amplifier of the present invention.

Figure 3 is a simplified schematic diagram of the preferred embodiment of a Low Noise Amplifier (LNA) in accordance with the present invention.

Figure 4 is a graph showing measured small signal s-parameters of the preferred embodiment of a Low Noise Amplifier (LNA) in accordance with the present invention previously seen in Figure 3.

Figure 5 is a graph showing IP3 and total current consumption of the preferred embodiment of the Low Noise Amplifier (LNA) in accordance with the present invention previously seen in Figure 3.

Figure 6 is a graph showing the noise figure of the Low Noise Amplifier (LNA) in accordance with the present invention previously seen in Figure 3.

Figure 7 is a graph showing spurious-free dynamic range of the Low Noise Amplifier (LNA) in accordance with the present invention previously seen in Figure 3.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention is embodied in a Low Noise Amplifier (LNA) circuit of new design. The LNA is particularly useful in a cellular, mobile, wireless radio communications system where jamming is occasionally experienced.

1. The Operational Environment

Figure 1, consisting of Figures 1a and 1b, illustrates some typical jammers as measured by an omni-directional 2.5 GHz antenna. Sources of a microwave oven, a navigational beacon ("nav."), a personal communication system cellular telephone ("PCS"), an analog cellular telephone ("Cellular"), television ("TV") and frequency modulation radio ("FM") are in particular illustrated. To avoid fatal interference from these jamming signals a low-noise amplifier must have a large dynamic range: namely, a low noise figure and low intermodulation distortion. See S. Chen, "Linearity Requirements for Digital Wireless Communication," IEEE GaAs IC Symp. Dig., Anaheim, CA, pp. 29-32, October 1997.

To meet these demands, LNAs often consume the most power in a receiver; tradeoffs are usually required to balance dynamic range versus power consumption.

2. The Preferred Embodiment of a Low Noise Amplifier (LNA) in Accordance With the Present Invention

For input RF power significantly below the compression point, linearity is not a concern as the intermodulation distortion products created by the LNA are negligible. Power consumption and noise figure are the primary considerations. As the input power rises, the intermodulation products increase rapidly. Hence, it is desirable for the LNA's intermodulation intercepts, such as the third-order intercept point (IP3), to increase as the input power increases.

Since linearity generally improves with increasing dc power, improving IP3 on a given device would require higher power consumption. In wireless communication systems, the LNA only occasionally experiences high input power -- when a strong jammer is present. Under these circumstances, increasing the power supplied to the LNA is a small price to pay to prevent loss of data or dropping the link.

At first glance, a Class AB amplifier has the ideal

prerequisites; the current drawn by the amplifier grows as increasing input power raises the dc bias of the active device. See K. L. Fong, C. D. Hull, and R. G. Meyers, "A Class AB Monolithic Mixer for 900-MHz Applications," IEEE Journal of Solid State Circuits, vol. 32, pp. 1166-1171, August 1997.

However, in the Class AB region, the device inherently clips once every period, creating undesired non-linearity. In addition, to achieve very low noise figure and high gain, FETs are preferred. Due to variations in saturation drain-source currents (I_{DSS}) and pinch-off voltages (V_p) intrinsic to the devices, the FETs can have vastly different drain-source currents (I_{DS}) for given bias voltages. Active biasing and bootstrapping are commonly used to mitigate these and variations over temperature, but both methods prevent the FETs from entering the Class AB region. Without any bias control, the power consumed by the FET becomes unpredictable.

The LNA design of the present invention avoids these undesired properties of FETs and the "Catch 22" situation by actively moving the load line 2, as shown in Figure 2, to a higher dc bias point -- instead of relying on the passive response of Class AB amplifiers. The Current-Voltage (IV) characteristics and load line of a typical first FET of a LNA are graphed in Figure 2.

The basic topology of the LNA design of the present invention is shown in the schematic diagram of Figure 3. The schematic comprises three sections -- 1) the active devices 31, 32, 2) the power detector 33 and 3) the bias control 34. The design employs a two-stage cascaded configuration with a low-noise Psuedomorphic High Electric Mobility Transistor (PHEMT) 31 (a type of Field Effect Transistor) at the input and a hetero-junction Field Effect Transistor (FET) 32 at the output. Two Schottky diodes D_1 , D_2 in a dual package form the power detector. Diode D_1 performs the detection, while diode D_2 provides temperature compensation. Reference T. Lee et al., "Temperature Dependence of the Ideality Factor of GaAs and Si Schottky Diodes," Physica Status Solidi, vol. 152, pp. 563-571, December 1995.

(For purposes of reference, the preferred Psuedomorphic High Electron Mobility Transistor (PHEMT) is a field effect semiconductor device where complex metalization structures are used to create a junction with higher electron mobility than can be achieved in pure Gallium Arsenide. In simplistic terms, PHEMTs provide a way to get the high mobility of Indium Phosphide on a Gallium Arsenide substrate, thereby avoiding the breakage problems associated with the very brittle Indium Phosphide wafers. The term "pseudomorphic" - literally "false form" - comes from the fact that the very thin semiconductor layer used to form the junction abandons its customary crystal lattice structure and assumes the form of the underlying GaAsS substrate, thus creating a mechanically viable structure. PHEMT technology is most commonly used to make ultra-low noise devices such as those used in the DBS market, or to make devices for operation at millimeter wave frequencies (i.e. above 20 GHz), or to make, quite obviously, the Low Noise Amplifier (LNA) of the present invention.)

The bias control is composed of two operational amplifiers 341, 342 that essentially act as comparators of the drain-source voltages (V_{DS}) of transistors 31, 32 and the power detector output voltage (V_{PD}).

Upon power-up, the gate-source voltages (V_{GS}) are initially zero with drain-source currents in saturation. At this moment, the negative inputs of the op-amps 341, 342 are equal to V_{PD} while the positive inputs are equal to

$$V_{DS} = V_{DD} - R_S I_{DS}$$

$V_{DS} < V_{PD}$ when $I_{DS} = I_{DSS}$. The op-amps 341, 342 therefore provide negative voltages to the gates of the FETs 31, 32,

$$V_{GS} = A(V_{DS} - V_{PD})$$

where A is the gain of each op-amp 341, 342.

Using the large-signal square-law approximation for junction FETs,

$$I_{DS} = I_{DSS} \left(1 - \frac{V_{GS}}{V_P} \right)^2$$

the relationship between I_{DS} and V_{PD} is then

$$I_{DS} = I_{DSS} \left[1 - \frac{A(V_{DD} - R_S I_{DS} - V_{PD})}{V_P} \right]^2$$

or

$$I_{DS} = \frac{V_P^2 - 2AR_S I_{DSS} V_P + 2A^2 R_S I_{DSS} (V_{DD} - V_{PD})}{2A^2 R_S^2 I_{DSS}}$$

See P. R. Gray and R. G. Meyer, *Analysis and Design of Analog Integrated Circuits*. New York: Wiley, 1993.

A square-root term is omitted from the last preceding equation as it is four orders of magnitude less than the other terms. I_{DS} is linearly proportional to V_{PD} .

The behavior of the power detector is described by the

zero-order Bessel function of the first kind. See R. G. Harrison and X. L. Le Polozec, "Nonsquarelaw Behavior of Diode Detectors Analyzed by the Ritz-Galerkin Method," IEEE Trans. Microwave Theory Tech., vol. 42, pp. 840-845, May 1994.

5 However, since the load resistance of diode D_1 is approximately one-half of the input resistance of the op-amp 341, and since the incident RF power into the diode D_1 is relatively weak, the simplified square-law relationship between V_{PD} and the LNA output power is sufficiently accurate.

10 The drain-source currents of the FETs 31, 32 therefore respond to the input power according to a square law. Steady-state is reached in approximately 0.7 millisecond. This feedback scheme also allows the bias control circuit to automatically compensate for device and temperature variations. The LNA requires supply
15 voltages of ± 3 V. The FETs 31, 32 are designed with a nominal I_{DS} of 5 mA each, with an additional 0.8 mA required by the op-amps 341, 342 and the diodes D_1 and D_2 . Less than 1 mA of total current variation is observed from -30°C to $+80^\circ\text{C}$ for a given input RF
20 power. The LNA is also insensitive to device variations in the op-amps 341, 342 and diodes D_1 , D_2 . Components from several manufacturers are used interchangeably with identical results.

25 In high power conditions, such as in the presence of a strong jammer, Diode D_1 conducts more current, lowering the negative inputs of the op-amps 341, 342, and thus increasing V_{GS} and I_{DS} of the FETs 31, 32. The LNA reaches a new steady state with higher dc power and improved linearity.

30 The power detector bias voltage can be adjusted to alter the steady-state I_{DS} of the FETs 31, 32. This adjustability offers the versatility of variable I_{DS} under small and large-signal conditions. For example, when the system is near the edge of receiver sensitivity, the symbol error rate may be excessively high. The system can decrease the bias voltage of power detector 33, lowering the output of the power detector 33 and forcing the currents of FETs 31, 32 to increase. The mechanism is the same as the

transition to high input power operation. As the FETs 31, 32 draw more current, their noise figure decreases while their gain increases, improving the receiver sensitivity. Adjusting the bias of the power detector bias 33 be performed independently or in
5 conjuncture with LNA's automatic response to high power signals.

3. Measurement Data for the Preferred Embodiment of a LNA in Accordance With the Present Invention

Figure 4 shows the small-signal performance of the preferred embodiment of a LNA in accordance with the present invention, previously seen in Figure 3, at 25 °C. At 2.5 GHz, the gain is 25.9 dB, with greater than 45 dB of reverse isolation. The input and output return losses are 16.0 dB and 19.9 dB respectively. The LNA is unconditionally stable as measured by the Rollett stability factor K and D from 50 kHz to 20 GHz with input powers up to 0 dBm. Reference G. Gonzalez, *Microwave Transistor Amplifiers, Analysis and Design*, Eaglewood Cliffs, NJ: Prentice Hall, 1984.

Figure 5 demonstrates the improvement in IP3 as the input power increases. The third-order intermodulation products (IM3) are measured with two equally powered fundamental continuous-wave signals at 2499 and 2500 MHz. Under small-signal conditions, the single-tone input IP3 is measured to be -9 dBm with 11 mA of total current. At -13 dBm total input power, the LNA reaches the maximum input IP3 of 6.8 dBm with 23.9 dB of gain and 22 mA of total current.

The Class AB performance of the LNA without the power detector and the op-amp circuitry of the present invention is included for comparison. The gate voltages are adjusted manually so that 5.5 mA is supplied to each FET 31, 32. The V_{DS} of each FET is set to 3.0 V. As Figure 5 shows, the bias control of the present invention significantly improves IP3 without requiring significantly more dc
30 power than would operation of the amplifier as a Class AB.

Figure 6 shows the NF of the LNA at 2.5 GHz at input power levels from -50 dBm to -10 dBm. The nominal Noise Figure (NF) at

25 °C is 0.87 dB. For purposes of experiment, a 2.4 GHz jammer is input into the LNA along with the thermal noise from the diode head. The jammer forces the LNA into large-signal operation. The NF decreases to 0.68 dB at -20 dBm input power. As the input power continues to rise, however, the LNA enters compression. The NF increases dramatically as the in-band diode noise is severely de-sensed by the jammer. The NF of the same LNA operating in Class AB, without the bias control of the present invention, is again included for comparison.

With higher IP3 and lower NF in large-signal operation, the preferred embodiment of an LNA in accordance with the present invention achieves a 10.5 dB improvement in spurious-free dynamic range (SFDR) compared to nominal conditions, as shown in Figure 7. See B. Razavi, *RF Microelectronics*, Upper Saddle River, NJ: Prentice Hall, 1998.

The bandwidth used for calculating SDFR is 1.25 MHz. The same LNA operated in Class AB could only obtain a 3.1 dB improvement in SFDR. A typical LNA with fixed current consumption exhibits little, if any, increase in SFDR as the input power is increased.

4. The Power Detector Circuit

Returning to Figure 3, the operation of the power detector circuit 33 may be more fully expounded.

The substantial functionality of the power detector 33 is realized in and by a resistive divider 331, the diode D_1 , and an envelope detector 332. The diode D_2 is used for temperature compensation, and may be replaced by a short for purposes of analysis of essential circuit function. Likewise, the a.c. path comprised of a resistor and a capacitor can equally as well be considered to be part of the cascade amplifier also including FETs 31 and 32 as of the power detector 33, and is best considered as a path of a.c. connection to such signal as will be monitored for power, ergo an a.c. signal.

By operation of the envelope detector 332 (to be explained),

the power detection circuit 33 will not respond at its output to rapid transients at its input (which is different than having a rapid response), and is really peak power detection circuit, and is hereinafter so called.

5 Connection, and function, of the a.c. signal peak power detector circuit 33 is as follows. The resistive voltage divider 331, located between the voltage source +3 V and ground, produces a reference voltage signal. In the preferred embodiment of Figure 3, this reference voltage is about 2.95 v.d.c.

10 Diode D_1 connects at its cathode both to the a.c. signal received through a.c. path 35 and to this reference voltage signal received from resistive divider 331.

15 The envelope detector 332, preferably consisting of a simple RC circuit as illustrated, connects both to the anode of the diode D_1 and (indirectly, through the diode D_2) to the reference voltage.

The output of the detector circuit 33, voltage P_{PD} , appears across the envelope detector 332 (and at the anode of the diode D_2).

20 In accordance with the explanation already rendered regarding the low noise amplifier of the present invention, the power detector circuit 33 will be understood to be determining how close is the amplified signal which is output from the FET 32 of the cascade amplifier to the reference voltage.

25 Namely, when this a.c. signal (as received into the power detector circuit 33 through the a.c. path 35) is zero, then output of the detector circuit -- signal P_{PD} -- is equal to the reference voltage. Alternatively, when this a.c. signal is not zero, then the output of the detector circuit -- signal P_{PD} -- is equal to the sum of (i) the reference voltage, plus (ii) a voltage (which is equivalent to power) of an envelope of the a.c. signal.

30 Clearly the power detector circuit 33 is responding to the power that is within the amplified signal from FET 32, as is required for the purposes of the present invention. Notably, this power is detected without direct reference to ground. Instead,

power is detected relative to the reference voltage developed in resistive voltage divider 331, and across the single diode D_1 . Signal propagation across diode D_1 is very fast, on the order of nanoseconds. Therefore the power detector circuit 33 has a very fast response time. Because (i) the power within the amplified a.c. signal received through a.c. path 35 is not compared to ground, but rather to the elevated voltage reference signal derived in resistive voltage divider 331, and (ii) the voltage across diode D_1 is much less than that across the Schottky diode of conventional power detectors, the power detection is also very sensitive, on the order of microvolts. This combination of speed and sensitivity is useful in realizing the improved low-noise amplifier of the present invention shown in Figure 3.

5. Conclusion

The low-noise amplifier with self-adjusting bias control in accordance with the present invention demonstrates low power consumption in nominal small-signal conditions. The preferred embodiment of an LNA showed significant improvement in dynamic range by automatically increasing the power consumption in the presence of a strong jammer to prevent receiver link degradation. The design concept of the present invention can be readily adapted to suit a variety of applications of differing frequencies and requirements.

In accordance with the preceding explanation, variations and adaptations of the Low Noise Amplifier (LNA) and/or the ungrounded a.c. power detector circuit in accordance with the present invention will suggest themselves to a practitioner of the electrical circuit design arts. For example, the feedback regulation of one or more bias currents need not be implemented with operational amplifiers. For example, the reference voltage to the power detection circuit need not be developed in a voltage divider, but could be derived from a more complex, but more stable, voltage source if absolute, as opposed to relative, power detection

CLAIMS

What is claimed is:

1. A method of operating an amplifier, which amplifier has an load line,

5 to emulate the property of a class AB amplifier where increasing amplifier input current raises the d.c. bias of the amplifier and increases amplifier output current,

nonetheless that the amplifier will never enter class AB operation and will always operate in class A,

10 the method of operating an amplifier always in class A nonetheless to producing more output current from more input current comprising:

15 monitoring the amplified output of the class A amplifier; and, in response to detecting an increase in the amplifier output,

20 dynamically biasing the load line of the amplifier to a higher d.c. bias point, causing the amplifier to consume more power and to produce a still larger amplified output signal, nonetheless to maintaining operation of the amplifier always in class A.

2. The class A amplifier operating method according to claim 1 used on a class A amplifier serving as an initial low noise radio signal amplifier in a wireless communication system;

25 wherein an increase in amplifier output signal is indicative of a presence of a strong jammer component in the amplifier input signal, so that moving the load line of the amplifier will cause the amplifier to draw more current beneficially decreasing a noise figure while increasing gain of the amplifier, and causing the amplifier to reach a new steady state with higher power and improved linearity.

30 wherein when no increase in amplifier output signal is detected, indicative that no strong jammer component is present within the amplifier input signal, then neither the d.c. bias, nor the load line, will be raised, and the amplifier will operate

quiescently, conserving power.

3. An amplifier comprising:

at least one Field Effect Transistor (FET) receiving at its gate an input signal from an external source and amplifying this input signal in accordance with its drain-source bias voltage V_{DS} to produce at its drain an amplified output signal;

a power detector circuit monitoring the amplified output signal to produce a detected-power voltage signal V_{DD} ; and

a dynamic bias control circuit comparing the detected-power signal V_{DD} to the drain-source bias voltage V_{DS} to vary a gate-to-source voltage bias V_{GS} of the input signal, actively moving a load line of the FET so as to cause the FET to consume more power when the amplified output signal is large;

wherein when the amplified output signal is large because of a presence of a strong jammer component of the input signal, then the moved load line of the at least one FET will cause the FET to draw more current decreasing noise figure while increasing gain, and will cause the amplifier of which the at least one FET forms a part to reach a new steady state with higher power and improved linearity;

wherein, however, when no strong jammer component of the input signal is present, and when the amplified output signal is correspondingly not large, then the FET, and the amplifier of which it forms a part, will conserve power;

wherein a self-adjusting bias of the at least one FET results in improved power consumption and improved dynamic range in an environment where exists occasional strong jammer signals.

4. The amplifier according to claim 3 wherein the at least one Field Effect Transistor (FET) comprises:

two cascaded FETs.

5. The amplifier according to claim 4 wherein the each of the two

cascaded FETs comprises:

a GaS FET.

6. The amplifier according to claim 4 wherein a first, input, one of the two cascaded FETs comprises:

a low-noise PHEMT;

and wherein a second, output, one of the two cascaded FETs comprises:

a hetero-junction FET.

7. The amplifier according to claim 3 wherein the dynamic bias control circuit comprises:

two operational amplifiers each varying a gate-to-source voltage bias V_{GS} of an associated FET.

8. The amplifier according to claim 3 wherein the power detector circuit comprises:

a resistor R ; and

a first diode D_1 series connected to form a diode-limited resistive divider.

9. The amplifier according to claim 8 wherein the diode-limited resistive divider and first diode D_1 are both temperature compensated by a second diode D_2 .

10. The amplifier according to claim 3 wherein the power detector circuit is temperature compensated.

11. The amplifier according to claim 3 operational in S band.

12. A low-noise amplifier (LNA) improved for having an elevated third-order input intercept point (IP3) and reduced noise figure during jamming, the LNA comprising:

at least one active device amplifying in accordance with a

bias signal an input signal received from an external source so as to produce an amplified output signal;

a power detector monitoring the amplified output signal to produce a detected-power signal; and

5 a dynamic bias control circuit responsive to any difference between the detected power signal and the bias signal to increase the bias signal, actively moving a load line of the at least one active device so as to cause this device to consume more power when the amplified output signal is large;

10 wherein when the amplified output signal is large because of a presence of jamming then the moved load line of the at least one active device will cause the active device to draw more current, decreasing noise figure while increasing gain, and will cause the amplifier of which the at least one active device forms a part to reach a new steady state with higher power and improved linearity.

15 13. The LNA according to claim 12 further improved for conserving power, the power detector and the dynamic bias control circuit and the at least one active device functioning so that when no jamming is present then, at nominal small-signal conditions, the at least one active device is biased to consume less power, conserving power in the amplifier of which it forms a part.

20 14. A method of low-noise amplification improved for

(i) conserving power during nominal small-signal conditions but also for

25 (ii) increasing its gain and reducing its noise figure during jamming, making less likely any loss of data, while

(iii) increasing its linearity, particularly as measured by a second-order intercept point IP2 and a third-order intercept point IP3, during jamming, the increased linearity reducing any signal distortion caused by jamming and again making less likely any loss of data,

30 the method comprising:

amplifying in at least one active device and in accordance with a bias signal an input signal received from an external source so as to produce an amplified output signal;

monitoring in a power detector the amplified output signal to produce a detected-power signal; and

adjusting, in a dynamic bias control circuit responsively to any difference between the detected power signal and the bias signal, the bias signal of the at least one active device so as to actively move a load line of this at least one active device and cause this at least one active device to consume more power when the amplified output signal is large;

wherein when the amplified output signal is large because of a presence of jamming then the moved load line of the at least one active device will cause the active device to draw more current, decreasing noise figure while increasing gain and increasing linearity, and will cause the amplifying to reach a new steady state with higher power and improved linearity;

wherein when no jamming is present then, at nominal small-signal conditions, the at least one active device is biased by the adjusting to consume less power, conserving power in the amplifying.

15. A method of low-noise amplification improved for

(i) conserving power during nominal small-signal conditions and also for

(ii) increasing amplification gain, reducing amplification noise figure, and increasing linearity during jamming, making less likely any loss of data,

the method comprising:

amplifying, in at least one active device and in accordance with a bias signal, an input signal received from an external source so as to produce an amplified output signal;

monitoring a power detector the amplified output signal to produce a detected-power signal;

comparing the detected-power signal with the bias signal to produce a difference signal; and

adjusting, in a dynamic bias control circuit responsively to the difference signal, the bias signal of the at least one active device so as to (i) actively move a load line of this at least one active device until (ii) the difference signal becomes zero at which time (iii) such distortion as might otherwise have appeared in the amplified output signal will be minimized;

wherein when the amplified output signal is large because of a presence of a jamming signal then the moved load line of the at least one active device will permit that (i) a larger input resulting from combination of the jamming signal with the input signal will be amplified (ii) without such distortion as would otherwise occur in amplification of these combined signals should the load line have not been moved.

16. A circuit for detecting a peak power of an a.c. signal, the peak power detector circuit comprising:

a resistive voltage divider, located between a voltage source and ground, producing a reference voltage signal;

a diode connecting at its cathode to both the a.c. signal and to the reference voltage signal; and

an envelope detector connected both to the anode of the diode and to the reference voltage;

wherein output of the detector circuit appears across the envelope detector;

wherein when the a.c. signal is zero then the detector circuit output is equal to the reference voltage;

wherein when the a.c. signal is not zero then the detector circuit output is equal to a sum of (i) the reference voltage, and (ii) a voltage of an envelope of the a.c. signal, which voltage of the envelope of the a.c. signal is equivalent to the power of the a.c. signal.

ABSTRACT

A discrete low-noise amplifier designed to operate in a mobile wireless environment uses two cascaded GaAs FETs to achieve 25 dB gain and 0.9 dB noise figure at 2.5 GHz. Active bias control circuitry responsive to monitored amplifier output power automatically and continuously adjusts the drain-source currents, and the load lines, of the cascaded FETs to (i) maintain power consumption at 33 milliwatts in nominal small-signal conditions, and to (ii) provide an elevated input third-order intermodulation intercept point (IP3) and a reduced noise figure during the presence of jamming. A 15 dB improvement in the input IP3 is achieved in large-signal operation. Amplifier operation is supported by an a.c. power detector of enhanced sensitivity and responsiveness because of un-grounded operation.

007F90-80556550

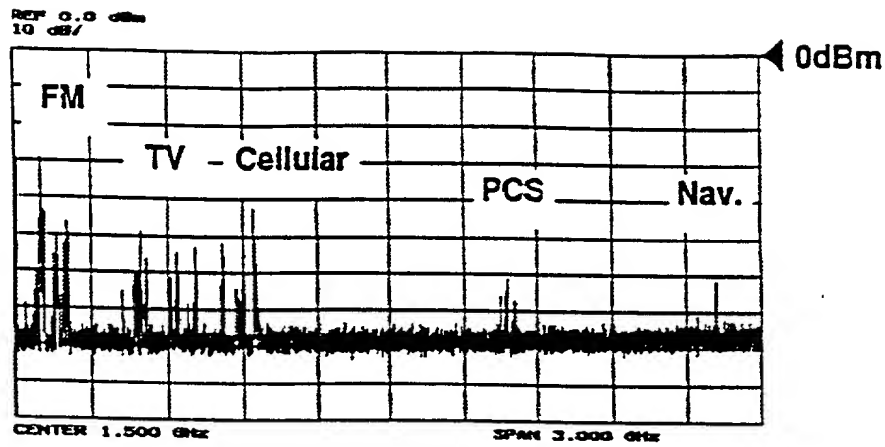


Figure 1a

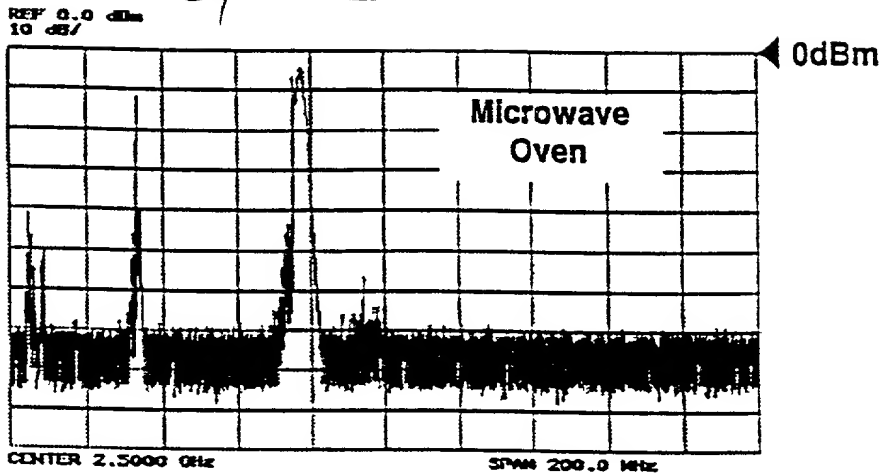


Figure 1b

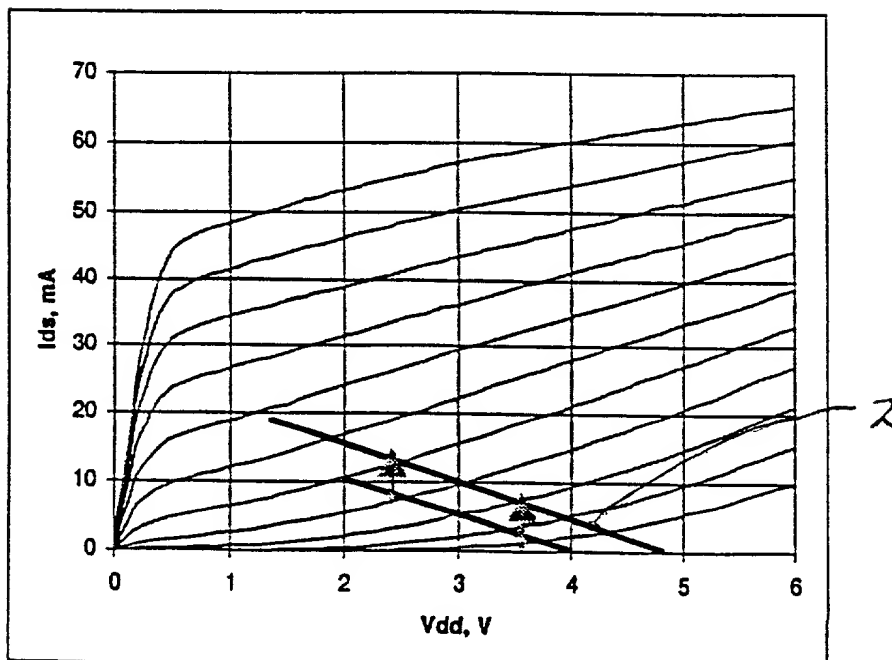


Figure 2.

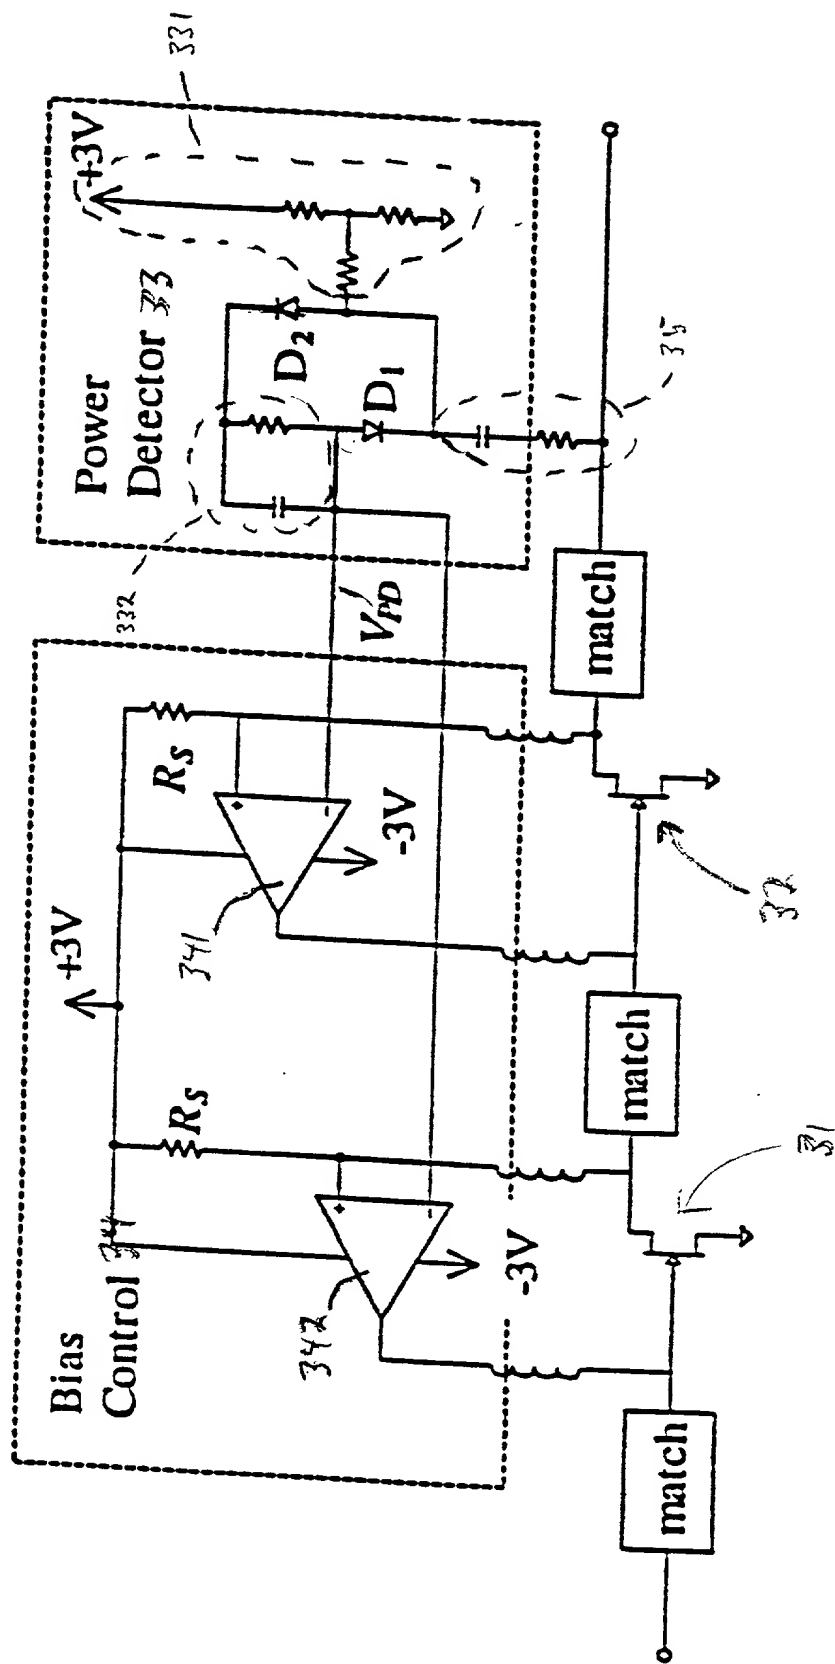


Figure 3.

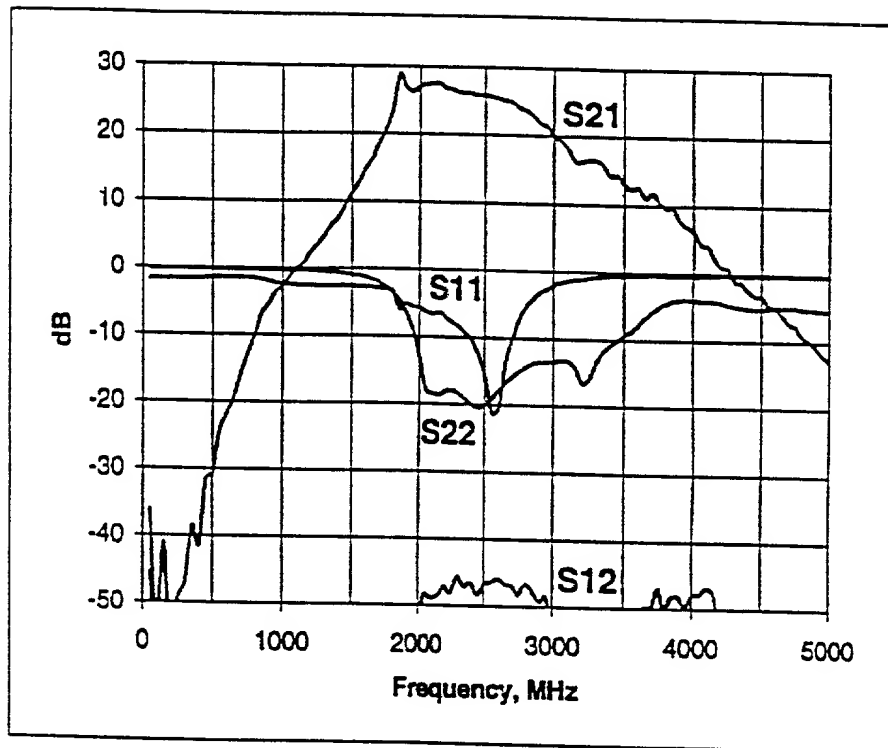


Figure 4.

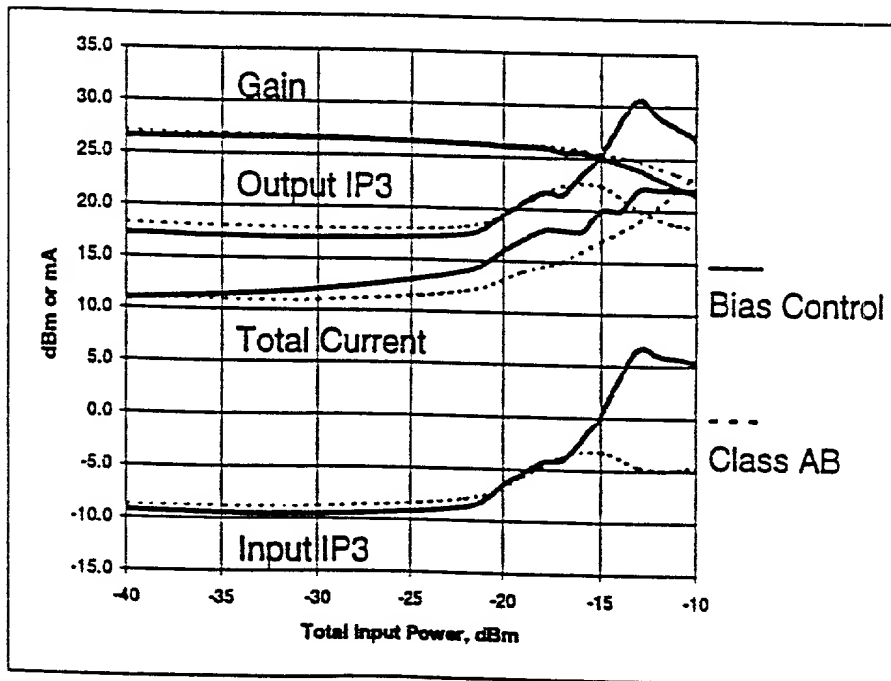


Figure 5

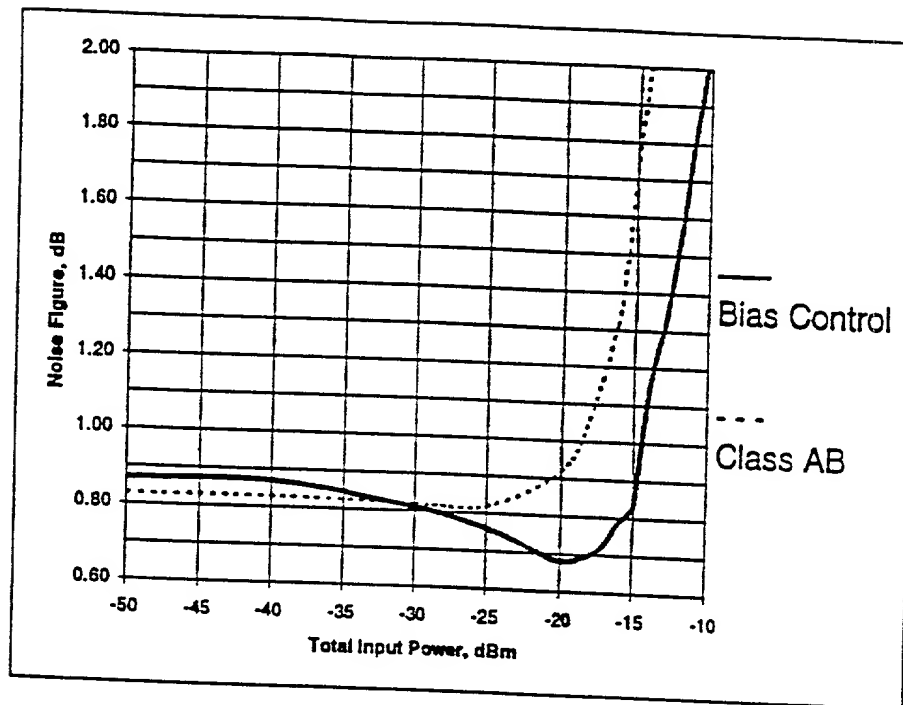


Figure 6.

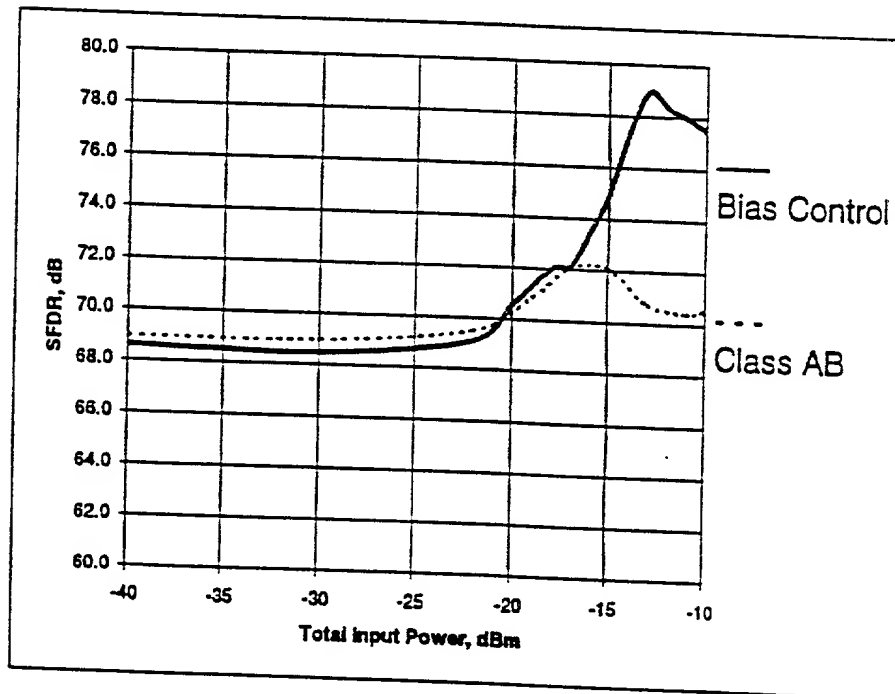


Figure 7

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
PATENT APPLICATION DECLARATION AND POWER OF ATTORNEY
(Page 1 of 2)

EACH OF THE APPLICANTS SIGNING BELOW HEREBY DECLARES THAT:

My residence, post office address, and citizenship are as stated next to my name in PART A on page 2 hereof.

I believe that I am an original, first, and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **AN S-BAND LOW-NOISE AMPLIFIER WITH SELF-ADJUSTING BIAS FOR IMPROVED POWER CONSUMPTION AND DYNAMIC RANGE IN A MOBILE ENVIRONMENT**, the specification of which is attached hereto.

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby declare that all statements made herein of my knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application of any patent(s) issued thereon.

I hereby appoint as my attorney with full power of substitution to prosecute this application and transact all business in the United States Patent and Trademark Office connected therewith:

William C. Fuess Registration Number 30,054

whose mailing address for this application is:

FUESS & DAVIDENAS
Attorneys at Law
10951 Sorrento Valley Road, Suite II-G
San Diego, California 92121-1613
Attention: William C. Fuess

and whose telecommunications numbers are:

Telephone: (858) 452-8293
Facsimile: (858) 452-6035
E-mail: fuess@funtv.com

All correspondence and telephone calls should be directed to William C. Fuess at the address and telephone number referenced above.

See next page 2 attached, signed, and made a part hereof.

PATENT APPLICATION DECLARATION AND POWER OF ATTORNEY
(Page 2 of 2)

PART A: Inventors' Information and Signatures

Full Name of First Inventor: Lawrence Larson
Citizenship: U.S.A.

Post Office Address: _____

Residence (if different): _____

Inventor's Signature: _____
Date: _____

Full Name of Second Inventor: Wei Xiong
Citizenship: _____

Post Office Address: _____

Residence (if different): _____

Inventor's Signature: _____
Date: _____

See page 1 to which this page is attached and of which this page is a part.